

Description

The S4558 is a monolithic Integrated Circuit designed for dual operational amplifier.

Features

- Power consumption as small as about 50mW (typ.)
- Built-in output short-circuit protecting circuit.
- Internal phase consumption type.
- No latch-up
- Wide same phase mode and differential voltage ranges
- High gain, low noise


Applications

- Active filters
- Audio amplifiers
- VCOs
- Other electronic circuits

Ordering Information

Type NO.	Marking	Package Code
S4558	S4558	SOP-8

Outline Dimensions

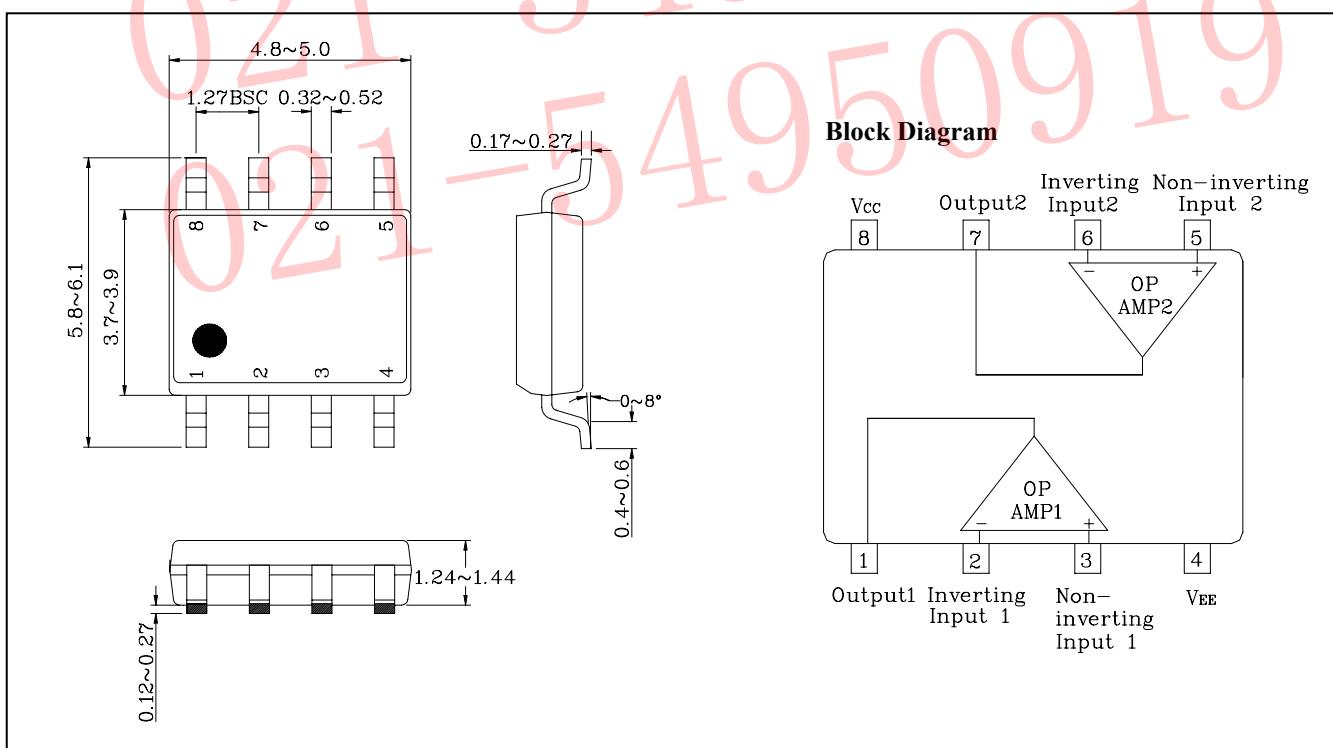

Absolute maximum ratings

Characteristic	Symbol	Ratings	Unit
Supply voltage	V _{CC}	36 or ± 18	V
Differential input voltage	V _{IND}	30	V
Input voltage	V _{IN}	± 15	V
Power Dissipation	P _D	300	mW
Operating temperature	T _{opr}	-45 ~ +85	°C
Storage temperature	T _{stg}	-55 ~ +150	°C

Electrical Characteristics

(Unless otherwise specified. V_{CC} = +15V, V_{EE} = -15V and Ta = 25 °C)

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Input offset voltage	V _{IOS}	R _g ≤ 10 kΩ	-	0.5	6	mV
Input offset current	I _{IOS}	-	-	5	200	nA
Input bias current	I _{IB}	-	-	60	500	nA
Input common mode Voltage Range	V _{ICR}	-	± 12	± 14	-	V
Maximum Output Voltage	V _{OM}	R _L ≥ 10 kΩ	± 12	± 14	-	V
		R _L ≥ 2 kΩ	± 10	± 13	-	V
Large signal Voltage Gain	G _V	V _{out} = ±10V, R _L ≥ 2 kΩ	86	100	-	dB
Common mode rejection ratio	CMRR	R _g ≤ 10 kΩ	70	90	-	dB
Power supply rejection ratio	PSRR	R _g ≤ 10 kΩ	-	30	150	uV/V
Slew Rate	SR	G _V = 1, R _L ≥ 2 kΩ	-	1.0	-	V/us
Supply Current	I _{CC}	-	-	4.0	6.0	mA
Equivalent input noise voltage	V _{NI}	RIAA, R _S = 1 kΩ, f = 30 Hz ~ 30 kHz	-	2.5	-	uVrms
Source Current	I _{SOURCE}	-	27	-	-	mA
Sink Current	I _{SINK}	-	27	-	-	mA

<http://www.yozo.hk>

Electrical Characteristic Curves

Fig. 1 $G_V - f$

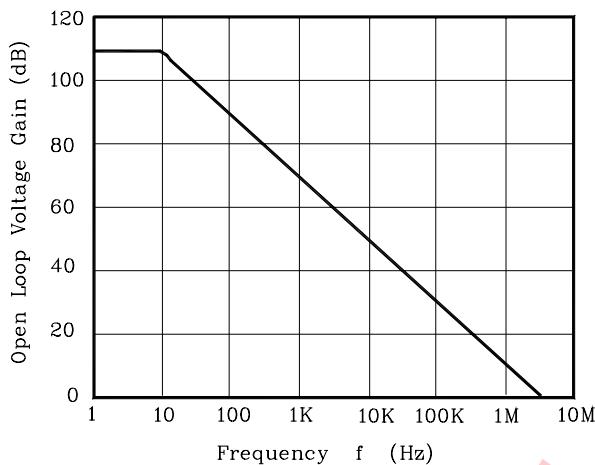


Fig. 2 $V_{OP-P} - f$

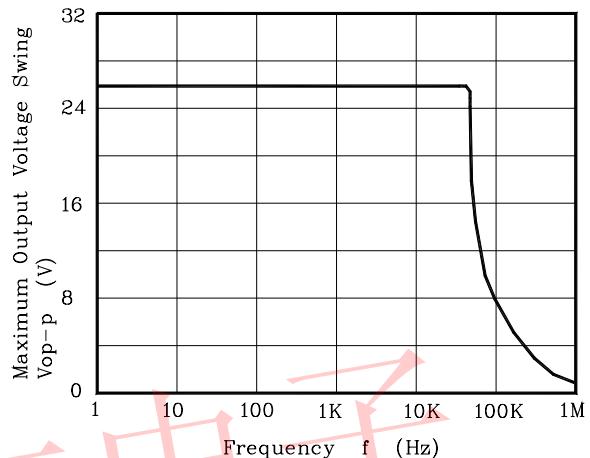


Fig. 3 $I_{IB} - T_a$

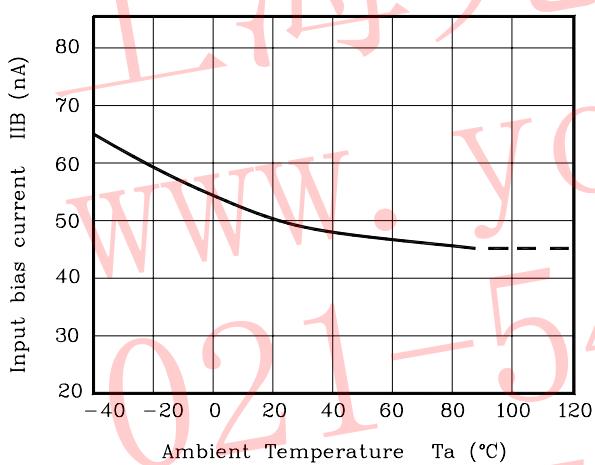


Fig. 4 $V_{OM} - V_{CC}, V_{EE}$

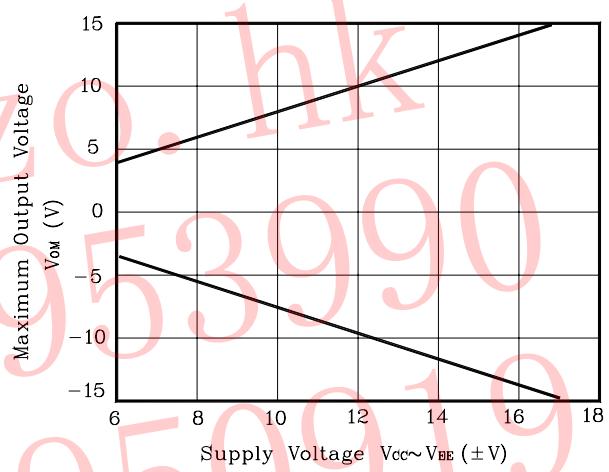


Fig. 5 $V_{OP-P} - R_L$

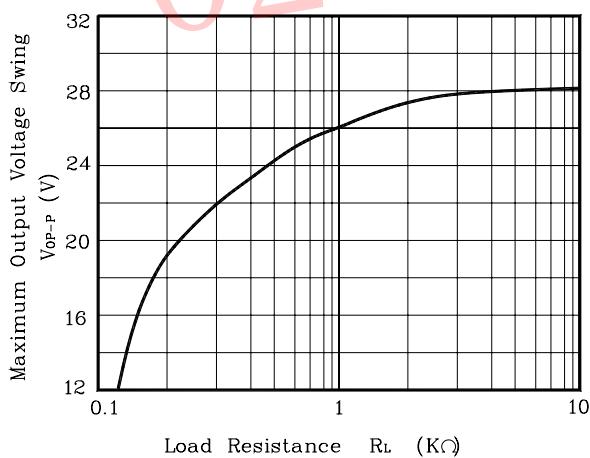


Fig. 6 $V_{NI} - f$

